

FCS-8000-VFD-B Video-based fire detection

AVIOTEC IP starlight 8000




- ▶ Very fast fire and smoke detection
- ▶ Robust against false alarms
- ▶ Covers large monitoring area
- ▶ Outstanding performance under low-light conditions
- ▶ Resolution 1080p

AVIOTEC IP starlight 8000 sets new standards in visual fire detection by combining reliable smoke and flame detection with outstanding speed.

System overview

The video-based fire detection is the system of choice when reliable video motion and fire detection is needed, e.g. applications which are not subjected to construction product regulation or a supplementation to existing fire detection systems. AVIOTEC IP starlight 8000 operates as stand-alone unit and doesn't need a separate evaluation unit. Furthermore, it contains all features of the Intelligent Video Analytics which allows analyzing and evaluating moving objects in parallel. Video-based fire detection and Intelligent Video Analytics operate independently from each other and are separately adjustable. A 10/100 Base-T Fast Ethernet port on the back part of the device is available to connect the camera to Ethernet. This allows easy configuration and monitoring through network devices such as Client PCs or mobile devices. A video recording management system may be integrated optionally. Furthermore, there is a relay output to transmit alarm signals, e.g. to the AVENAR panel. In this case the camera acts as supervisory signal-initiating device. Alarms have to be verified by an operator in a monitoring center owing to non-existing standards. Automatic alarm-forwarding to fire services is not provided.

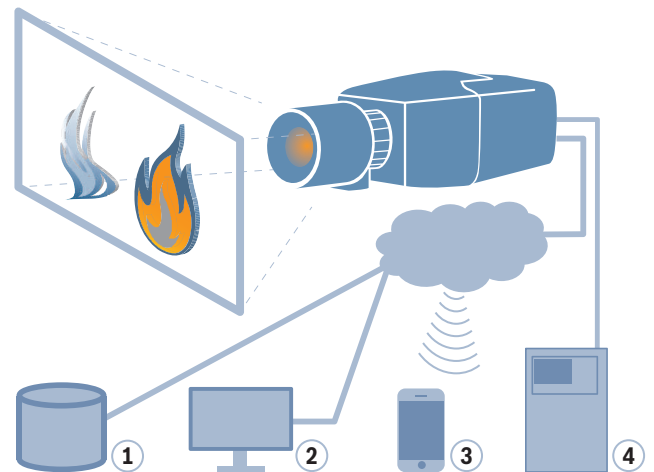

Pos.	Description
1	Video Recording Manager (VRM)
2	Client PC
3	Mobile Device
4	AVENAR panel

Functions

Fast and reliable flame and smoke detection

A unique Bosch algorithm based on physical characteristics of fires detects flames and smoke within an incredibly short time span by analyzing video sequences. The video-based fire detection

works under remarkable low-light performance (down to 2 lx) and detects test fires TF1 to TF8. In case of flame or smoke detection the video broadcast has the advantage to verify the alarm, speed up the rescue chain and give insights to rescue teams.

Monitoring large areas

Insensitive to dust and humidity thanks to the optical principle, it is possible to monitor large indoor and sheltered outdoor areas that push conventional systems to their limits. AVIOTEC IP starlight 8000 is the innovative solution for:

- Industry
- Transportation
- Energy & Utilities
- Warehouses

Large application range

The video-based fire detection is suitable for a range of challenging applications in harsh environments with a high fire hazard like paper mills. Highly versatile in application, AVIOTEC IP starlight 8000 offers the possibility to complement existing systems or to tap into new application fields.

Individually adjustable and adaptable

Verification time, sensitivity, detection size and selective masking for smoke and flame are individually configurable to adjust them to the customer needs. Flame and smoke detection can be activated or deactivated separately.

Root cause analysis

Connecting the camera to a video management system offers the possibility to find out the cause of fires. Based on video recordings, incidents can carefully be established and evaluated. This helps eliminating and preventing hazardous situations in the future.

Easy installation

Power for the camera can be supplied via a Power-over-Ethernet compliant network cable connection. With this configuration, only a single cable connection is required to view, power, and control the camera. Using PoE makes installation easier and more cost-effective, as cameras do not require a local power source.

The camera can also be supplied with power from +12 VDC power supplies. To increase system reliability, the camera can be simultaneously connected to both PoE and +12 VDC supplies. Additionally, uninterruptible power supplies (UPS) can be used to ensure continuous operation, even during a power failure.

For trouble-free network cabling, the camera supports Auto-MDIX which allows the use of straight or cross-over cables.

Regulatory information

Standards	Type
Emission	EN 55022 Class B (2010), +AC (2011) FCC: 47 CFR 15, class B (2012-10-1)
Immunity	EN 50130-4 (PoE, +12 VDC)* (2011) EN 50121-4 (2006), +AC: (2008)
Alarm	EN 50130-5 Class II (2011)
Safety	EN 60950-1 UL 60950-1 (2nd edition) CAN/CSA-C 22.2 No. 60950-1
Vibration	Camera with 500 g (1.1 lb) lens as per IEC 60068-2-6 (5 m/s ² , operational)
HD	SMPTE 296M-2001 (Resolution: 1280x720) SMPTE 274M-2008 (Resolution: 1920x1080)
Color representation	ITU-R BT.709
ONVIF conformance	EN 50132-5-2; IEC 62676-2-3

* Chapters 7 and 8 (mains voltage supply requirement) are not applicable to the camera. However, if the system in which this camera is used needs to comply with this standard, then any power supplies used must comply with this standard.

VdS certification only valid with the supplied lens.

Region	Regulatory compliance/quality marks	
Morocco	CMIM	FCS-8000-VFD-B
Macao Special Administrative Region Government	CB	0851/GEL/DPI/2020
Germany	VdS	G 217090 AVIOTEC IP starlight 8000
Europe	CE	FCS-8000-VFD-B
USA	FCC	FCS-8000-VFD-B
Australia	CSIRO	afp-3323 AVIOTEC IP starlight 8000

Installation/configuration notes


Disclaimer
IMPORTANT: Video fire indication systems are video content analysis systems. They give indications for possible fires and are designed to supplement fire detection systems and human guards in monitoring centers in order to recognize possible dangerous situations. Video fire indication systems are confronted with a higher amount of challenges considering scenery and background compared to conventional fire detection

systems. They cannot ensure that fire will be detected reliably in all scenery settings. Thus, the video fire detection system shall be seen as a support system that enhances the probability of early fire detection, with the restriction that it shall not be seen as a system that ensures fire detection in all possible image scenarios and it might detect false alarms. Conventional fire alarm systems must in no way be replaced by video-based fire alarm systems.

In addition, and for the U.S. market only, Bosch Security Systems makes no representation that the video fire indication system will prevent any personal injury or property loss by fire or otherwise; or that such product will in all cases provide adequate warning or protection. Buyer understands that a properly installed and maintained fire indication system may only reduce the risk of a fire or other events occurring without providing an alarm, but it is not insurance or a guarantee that such will not occur or that there will be no personal injury or property loss as a result.

Consequently, Bosch Security Systems shall have no liability for any personal injury, property damage or other loss based on a claim the product failed to give warning.

The camera must be mounted according to the following graphic:

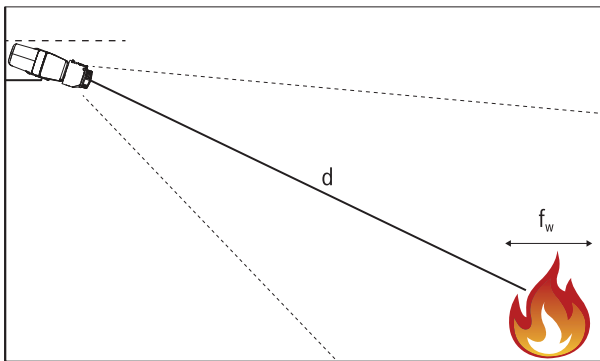

d	Distance to fire
f _w	Flame width

The maximum distance to fire depends on f_w and the lens settings.

The tables below demonstrate exemplarily the maximum distances to a fire depending on fire size and opening angle of the camera lens:

Maximum distance to fire in m (Flame detection)

LVF-5005C-S4109 (standard lens)			
	Opening angle [°]		
	100	60	45
Fire width [m]			
0.3	18.2	27.6	36
0.5	30.4	46.1	60
1	60.9	92.2	120
2	121.9	184.4	240.1

LVF-8008C-P0413			
	Opening angle [°]		
	100	60	33
Fire width [m]			
0.3	18.4	27.6	48.4
0.5	30.7	46	80.7
1	61.5	92.1	161.4
2	123.1	184.3	322.8

LVF-5005N-S1250			
	Opening angle [°]		
	33	20	8.5
Fire width [m]			
0.3	48.5	79.1	185.1
0.5	80.9	131.8	308.5
1	161.8	263.7	617
2	323.6	527.5	1234.1

Maximum distance to fire in m (Smoke detection)

LVF-5005C-S4109 (standard lens)			
	Opening angle [°]		
	100	60	45
Smoke width [m]			

LVF-5005C-S4109 (standard lens)			
0.3	12.5	19.3	25.2
0.5	21.3	32.2	42
1	42.6	64.5	84
2	85.3	129	168.1

LVF-8008C-P0413			
Opening angle [°]			
	100	60	33
Smoke width [m]			
0.3	12.9	19.3	33.8
0.5	21.5	32.2	56.4
1	43.1	64.5	112.9
2	86.2	129	225.9

LVF-5005N-S1250			
Opening angle [°]			
	33	20	8.5
Smoke width [m]			
0.3	33.9	55.3	129.5
0.5	56.6	92.3	215.9
1	113.2	184.6	431.9
2	226.5	369.2	863.9

Parts included	
Quantity	Component
1	AVIOTEC IP starlight 8000
1	Varifocal SR Megapixel Lens (LVF-5005C-S4109 F.01U.297.770)
1	TC9208 bracket (TC9208 F.01U.143.919)

Technical specifications

Algorithm Overview	
Min. detection size for Smoke, standard setting (% of picture width)	1.6
Smoke speed (% of picture height /s)	0.7 - 16
Min. Smoke density (%)	40
Min. detection size for Flame, standard setting (% of picture width)	1.1
Min. illumination level (lx)	2
Min. illumination level with IR illumination (lx)	0

Audio streaming	
Standard	G.711, 8 kHz sampling rate L16, 16 kHz sampling rate AAC-LC, 48 kbps at 16 kHz sampling rate AAC-LC, 80 kbps at 16 kHz sampling rate
Signal-to-Noise Ratio	>50 dB
Audio Streaming	Full-duplex / half duplex

Environmental	
Operating Temperature	-20°C to +50°C (-4°F to 122°F)
Storage Temperature	-30°C to +70°C (-22°F to +158°F)
Operating Humidity	20% to 93% RH
Storage Humidity	up to 98% RH

Input/output	
Analog video out	SMB connector, CVBS (PAL/NTSC), 1 Vpp, 75 Ohm
Audio line in	1 Vrms max, 18 kOhm typical,
Audio line out	0.85 Vrms at 1.5 kOhm typical,
Audio connectors	3.5 mm mono jack
Alarm input	2 inputs
Alarm input activation	+5 VDC nominal; +40 VDC max. (DC-coupled with 50 kOhm pull-up resistor to +3.3 VDC) (< 0.5 V is low; > 1.4 V is high)
Alarm output	1 output
Alarm output voltage	30 VAC or +40 VDC max.

Input/output	
	Maximum 0.5 A continuous, 10VA (resistive load only)
Ethernet	RJ45
Data port	RS-232/422/485
Local storage	
Internal RAM	10 s pre-alarm recording
Memory card slot	Supports up to 32 GB microSDHC / 2 TB microSDXC card. (An SD card of Class 6 or higher is recommended for HD recording)
Recording	Continuous recording, ring recording, alarm/ events/schedule recording
Mechanical	
Dimensions (W x H x L)	78 x 66 x 140 mm (3.07 x 2.6 x 5.52 inch) without lens
Weight	855 g (1.88 lb) without lens
Color	RAL 9006 Metallic Titanium
Tripod Mount	Bottom and top 1/4-inch 20 UNC
Sustainability	PVC free
Network	
Protocols	IPv4, IPv6, UDP, TCP, HTTP, HTTPS, RTP/RTCP, IGMP V2/V3, ICMP, ICMPv6, RTSP, FTP, ARP, DHCP, APIPA (Auto-IP, link local address), NTP (SNTP), SNMP (V1, V3, MIB-II), 802.1x, DNS, DNSv6, DDNS (DynDNS.org, selfHOST.de, no-ip.com), SMTP, iSCSI, UPnP (SSDP), DiffServ (QoS), LLDP, SOAP, Dropbox™, CHAP, digest authentication
Encryption	TLS1.0/1.2, AES128, AES256
Ethernet	10/100 Base-T, auto-sensing, half/full duplex
Connectivity	Auto-MDIX
Interoperability	ONVIF Profile S; ONVIF Profile G
Optical	
Lens mount	CS mount (C-mount with adapter ring)
Lens connector	Standard 4-pin DC-iris connector / P-iris* connector

Optical	
Focus control	Motorized back-focus adjustment
Iris control	DC-iris and P-iris* control
Power	
Power Supply	12 VDC; Power-over-Ethernet 48 VDC nominal
Current Consumption	750 mA (12 VDC); 200 mA (PoE 48 VDC)
Power Consumption	9 W
PoE	IEEE 802.3af (802.3at Type 1) Class 3
Sensor	
Type	1/1.8" CMOS
Total sensor pixels	6.1 MP
Software	
Unit Configuration	Via web browser or Configuration Manager
Firmware update	Remotely programmable
Software viewer	Web browser, Bosch Video Client, or third party software
Video resolution	
1080p HD	1920 X 1080
720p HD	1280 x 720
Upright 9:16 (cropped)	400 x 720
D1 4:3 (cropped)	704 x 480
480p SD	Encoding: 704 x 480; Displayed: 854 x 480
432p SD	768 x 432
288p SD	512 x 288
240p SD	Encoding: 352 x 240; Displayed: 432 x 240
144p SD	256 x 144
Video streaming	
Video compression	H.264 (MP); M-JPEG

Video streaming	
Streaming	Multiple configurable streams in H.264 and M-JPEG, configurable frame rate and bandwidth. Regions of Interest (ROI)
Overall IP Delay	Min. 120 ms, Max. 340 ms
GOP structure	IP, IBP, IBBP
Encoding interval	1 to 30 [25] fps
Encoder regions	Up to 8 areas with encoder quality settings per area
LVF-5005C-S4109	
Maximum sensor format	1/1.8-inch
Optical resolution	5 Megapixels
Focal length	4.1 - 9 mm
Iris range	F1.6 to F8
Min object distance	0.3 m (1 ft)
Back focus distance (values in air)	12.72 mm (wide), 19.94 mm (tele)
Weight	130 g (0.29 lb)
Dimensions	Ø 62.9 mm (excluding focus and zoom knobs) x 66.6 mm (excluding flange)
Lens mount	CS
Angle of view (HxV) 1/1.8-inch sensor 16:9	101 x 56° Wide 46 x 26° Tele
Iris control	4-pin, DC control
Focus ctrl	manual
Zoom ctrl	manual
IR corrected	yes
Environmental	
- Operating Temperature	-10°C to +50°C (+14°F to +122°F)
- Storage Temperature	-40°C to +70°C (-40°F to +158°F)
- Operating Humidity	Up to 93% non-condensing

LVF-5005C-S4109	
- Certification	CE
LVF-5005N-S1250	
Maximum sensor format	1/1.8-inch
Optical resolution	5 Megapixels
Focal length	12 - 50 mm
Iris range	F1.8 to T360
Min object distance	0.8 m (2.63 ft)
Back focus distance (values in air)	10.19 mm (wide), 10.12 mm (tele) values in air
Weight	175 g (0.386 lb)
Dimensions	Ø 52.4 mm x 89.3 mm
Lens mount	C
Angle of view (HxV) 4:3	33 x 25° Wide 8 x 6° Tele
Angle of view (HxV) 1/3-inch sensor 16:9	24 x 14° Wide 6 x 3° Tele
Angle of view (HxV) 1/2.7-inch sensor 16:9	27 x 16° Wide; 6.7 x 3.8° Tele
Angle of view (HxV) 1/1.8-inch sensor 16:9	33 x 19° Wide; 8.3 x 4.7° Tele
Iris control	4-pin, DC control
Focus ctrl	manual
Zoom ctrl	manual
IR corrected	yes
Environmental	
- Operating Temperature	-10°C to +50°C (+14°F to +122°F)
- Storage Temperature	-20°C to +60°C (-4°F to +140°F)
- Operating Humidity	35% to 90% non-condensing
- Certification	CE

LVF-8008C-P0413

Environmental	
Operating Temperature	-10°C to +50°C (+14°F to +122°F)
Storage Temperature	-40°C to +60°C (-40°F to + 140°F)
Operating Humidity	Up to 90% non-condensing
Angle of view with DINION IP starlight 8000 MP (HxV)	
16:9 mode	Wide: 105x57°; Tele: 33x18.5°
4:3 mode	Wide: 94x70°; Tele: 30x22°
Mechanical	
Weight	172 g (0.38 lb)
Dimensions	Ø 65 x 93 mm
Lens mount	CS-mount
Optical	
Maximum sensor format	1/1.8-inch
Focal range	4 – 13 mm
Iris range	F1.5 to close
Min. object distance	0.3 m (1 ft)
Back focus distance	15.24 mm (in air)
Iris control	P-iris stepping motor (120 steps)
Focus control	Rotational ring and locking screw
Zoom control	Rotational ring and locking screw
IR corrected	Yes

Ordering information

FCS-8000-VFD-B Video-based fire detection

Fast and secure identification of smoke and flames by video-based fire detection.

Order number	Asset Key	Vepos
FCS-8000-VFD-B F.01U.317.536	4640 5598	0546 3546

Accessories

UHI-OG-0 Indoor camera housing

Order number	Asset Key	Vepos
UHI-OG-0 F.01U.026.741	4970	8551

UHI-OGS-0 Indoor housing with sunshield

Indoor camera housing with sunshield.

Order number	Asset Key	Vepos
UHI-OGS-0 F.01U.028.282	4970	8559

UHO-POE-10 Outdoor housing, POE + power supply

Outdoor camera housing with PoE+ power supply.

Order number	Asset Key	Vepos
UHO-POE-10 F.01U.300.502	4970	0452

UHO-HBGS-11 Outdoor housing, 24VAC, feed-through

Outdoor housing for (24 VAC / 12 VDC) camera with 24 VAC power supply, blower and feed-through cabling.

Order number	Asset Key	Vepos
UHO-HBGS-11 F.01U.302.304	4970	0614

UHO-HBGS-51 Outdoor housing, blower, 230VAC/35W

Outdoor housing for (230 VAC / 12 VDC) camera with 230 VAC power supply, blower and feed-through cabling.

Order number	Asset Key	Vepos
UHO-HBGS-51 F.01U.302.310	4970	0620

UHO-HBGS-61 Outdoor housing, blower, 120VAC/35W

Outdoor housing for (120 VAC / 12 VDC) camera. 120 VAC power supply; blower; feed-through cabling

Order number	Asset Key	Vepos
UHO-HBGS-61 F.01U.302.311		

HAC-TAMP01 Tamper switch kit for UHI/UHO Series

Tamper switch kit for HSG and UHI/UHO series enclosures

Order number	Asset Key	Vepos
HAC-TAMP01 F.01U.005.044	4970	5044

LTC 9215/00 Wall mount with cable feed through, 12"

Wall mount for camera housing, cable feed-through, 30 cm (12 in); for outdoor use.

Order number	Asset Key	Vepos
LTC 9215/00 4.998.137.651	4970	6758

LTC 9215/00S Wall mount for UHI/UHO

Wall mount for camera housing, cable feed-through, 18 cm (7 in); for indoor use.

Order number	Asset Key	Vepos
LTC 9215/00S F.01U.503.621	4970	7323

LTC 9219/01 Feed through J mount

J-mount for camera housing, 40 cm (15 in); for indoor use.

Order number	Asset Key	Vepos
LTC 9219/01 F.01U.503.623	4970	7324

LVF-5005N-S1250 Varifocal lens, 12-50mm, 5MP, C mount

Varifocal megapixel IR corrected lens with 1/1.8" sensor max and C-mount

Order number	Asset Key	Vepos
LVF-5005N-S1250 F.01U.305.567	4970	0307

LVF-8008C-P0413 Varifocal lens, 4-13mm, 12MP, CS mount

Varifocal megapixel lens; P-iris; CS-mount; 1/1.8" ; F1.5; 4-13mm

Order number	Asset Key	Vepos
LVF-8008C-P0413 F.01U.319.331	4640	0681

IIR-50850-SR Illuminator, 850nm, short range

Short range IR illuminator 850 nm

Order number	Asset Key	Vepos
IIR-50850-SR F.01U.319.313	4970	0693

IIR-50940-SR Illuminator, 940nm, short range

Short range IR illuminator

940 nm

Order number	Asset Key	Vepos
IIR-50940-SR F.01U.319.314	4970	0694

IIR-50850-MR Illuminator, 850nm, medium range

Medium range IR illuminator

850 nm

Order number	Asset Key	Vepos
IIR-50850-MR F.01U.319.315	4970	0695

IIR-50940-MR Illuminator, 940nm, medium range

Medium range IR illuminator

940 nm

Order number	Asset Key	Vepos
IIR-50940-MR F.01U.319.316	4970	0696

IIR-50850-LR Illuminator, 850nm, long range

Long range IR illuminator

850 nm

Order number	Asset Key	Vepos
IIR-50850-LR F.01U.319.317	4970	0697

IIR-50940-LR Illuminator, 940nm, long range

Long range IR illuminator

940 nm

Order number	Asset Key	Vepos
IIR-50940-LR F.01U.319.318	4970	0698

IIR-50850-XR Illuminator, 850nm, extra range

Extra long range IR illuminator

850 nm

Order number	Asset Key	Vepos
IIR-50850-XR F.01U.319.319	4970	0699

IIR-50940-XR Illuminator, 940nm, extra range

Extra long range IR illuminator

940 nm

Order number	Asset Key	Vepos
IIR-50940-XR F.01U.319.320	4970	0700

NIR-50850-MRP Illuminator, 850nm, medium range, PoE+

Medium range IR illuminator powered by PoE+

850 nm

Order number	Asset Key	Vepos
NIR-50850-MRP F.01U.319.321	4970	0691

NIR-50940-MRP Illuminator, 940nm, medium range, PoE+

Medium range IR illuminator powered by PoE+

940 nm

Order number	Asset Key	Vepos
NIR-50940-MRP F.01U.319.322	4970	0692

Services**EWE-AVIOTEC-IW 12 mths wrty ext Aviotec starlight 8000**

12 months warranty extension

Order number	Asset Key	Vepos
EWE-AVIOTEC-IW F.01U.360.765		

Represented by:

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: +31 40 2577 284
www.boschsecurity.com/xc/en/contact/
www.boschsecurity.com

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Tel.: +49 (0)89 6290 0
Fax: +49 (0)89 6290 1020
de.securitysystems@bosch.com
www.boschsecurity.com

North America:
Bosch Security Systems, LLC
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
onlinehelp@us.bosch.com
www.boschsecurity.com

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
www.boschsecurity.com/xc/en/contact/
www.boschsecurity.com